

NOSE MASK


Part Number:

99990-00995

99990-00996

INSTALLING YOUR NEW NOSE MASK: For 1982

For initial installation, fit Nose Mask over front of vehicle, and when taut, fold padded tabs over to form securing hooks.

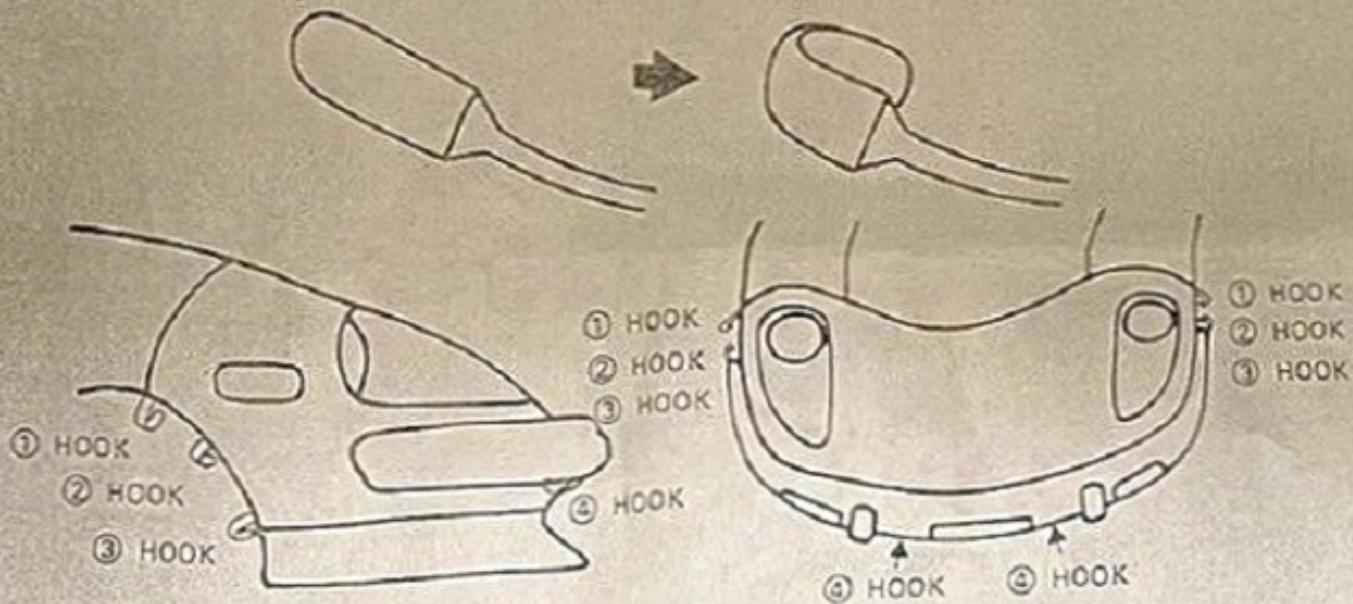

Securing hooks 1, 2 and 3 are attached to the leading edges of the front fender lips. Securing hook 4 is attached to the trailing edge of the front bumper underside. Secure bra material behind bumper guards.

Neither Nissan Motor Corporation in U.S.A. nor the Nose Mask manufacturer is responsible for damage caused by the Nose Mask to paint or other portions of the vehicle. To avoid such damage, it is recommended that the following precautions be observed while using this product:

1. Remove all dirt and dust from surface areas on the car covered by the Nose Mask.
2. Be sure the Nose Mask (particularly the flannel lining) is clean before installation on the car. The vinyl carrying bag is provided to protect the Nose Mask when not in use.
3. Make certain that paint on recently replaced repainted surface areas covered by the Nose Mask is completely cured before installation.
4. Install Nose Mask only when Nose mask and car are completely dry. If the Mask is wet and is allowed to dry, the car, heat from the sun can cause paint to "cloud."
5. Excessive speed or unusual high wind/crosswind conditions can cause the Nose Mask to flap and damage the paint. If flapping becomes a problem while driving, stop and car and remove the Nose Mask.