

Bulletin No.	TS83-012
Date	Jan. 10, 1983
Classification	BF83-003
Section	Body, Frame
Models	All

CHILD RESTRAINT SYSTEM FRONT SEAT BELT LOCKING CLIP

A growing number of states are passing legislation requiring that all children 4 years and younger be secured by a child restraint system when occupying a seat in a moving vehicle. To assist in using most child seats or infant carriers in the front seat of a vehicle, Nissan is making available a front seat belt locking clip. The part is available now.

In vehicles produced after January, 1983, the owners manual will contain information describing the new clip. The illustration and installation/adjustment procedures on the following page describe the Nissan Child Restraint Locking Clip.

Please advise all of your sales, service, and parts personnel about the availability of this part and insure that these personnel are familiar with the proper installation procedure, so that they can demonstrate the proper use of the locking clip.

The clip will allow most current infant carriers or child seats to be installed in the front passenger seat of a vehicle. The clip is not required for rear seat installation of an infant carrier or child's seat.

Parts Information

Name	Part Number
Locking Clip	999JW-A3000

SEAT BELT LOCKING CLIP

Part Number 999JW-A3000

INSTRUCTIONS FOR USE WITH INFANT AND CHILD RESTRAINT SYSTEMS

This locking clip (Figure 1) is designed to be used **only** with the **right front seat belts**. The combination lap and shoulder belt has a one-piece continuous-loop design (Figure 2), and the locking clip must be used to hold the lap belt portion snugly in position around the child restraint system. If the locking clip is not used, the child restraint system may move and permit slack in the seat belts. This may reduce the effectiveness of the restraint system in the event of a sudden stop or accident.




Figure 1
LOCKING CLIP
PART NO. 999JW-A3000

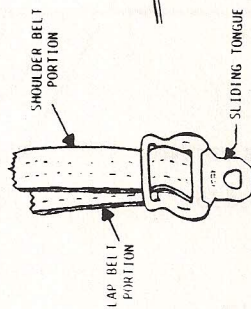


Figure 2
CONTINUOUS-LOOP
FRONT SEAT BELT

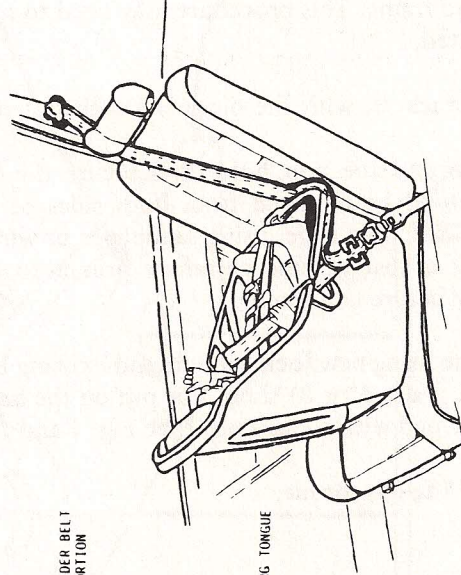


Figure 5
TYPICAL INSTALLATION ON RIGHT FRONT
SEAT, "INFANT CARRIER" SHOWN.
FOLLOW SAME LOCKING CLIP INSTRUCTIONS
FOR FORWARD-FACING CHILD RESTRAINT
SYSTEM.

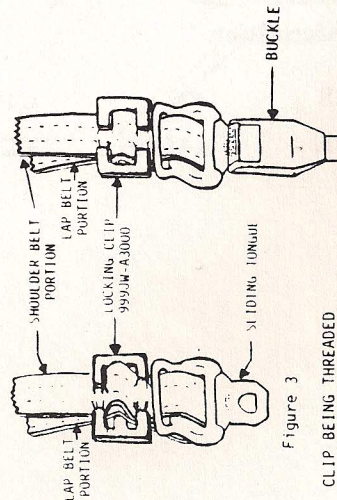


Figure 3
CLIP BEING THREADED
ONTO BELT

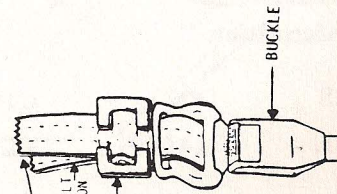


Figure 4
CORRECT LOCKING CLIP
INSTALLATION

HOW TO INSTALL THE LOCKING CLIP

- Step ① Place the child restraint system on the seat. Follow the child restraint system manufacturer's instructions for proper forward-facing or rear-facing position.
- Step ② Extend the vehicle's **lap belt portion**, placing it in or through the proper slots in the child restraint system. Do not allow the lap belt to become twisted. Buckle the vehicle's seat belt. Grasp the shoulder harness portion and pull to remove all slack from the lap belt portion.
- Step ③ Grasp both the lap and shoulder belt portions of the webbing next to the sliding tongue. Unbuckle the belt, but do not allow any webbing to slip through the tongue. Thread both portions of the belt webbing through the locking clip as shown in Figure 3. The locking clip should be positioned near the sliding tongue.
- Step ④ Rebuckle the vehicle's seat belt by inserting the tongue into the buckle (Figure 4) until you hear a snapping sound. The lap belt should be snug around the child restraint system, as it was in Step 2. If it is too loose or too tight, readjust the locking clip to obtain a snug fit. Tuck the shoulder belt portion between the child restraint system and the seat back (Figure 5).

CAUTION:

Use the locking clip only with a child restraint system. For regular seat belt use, remove the locking clip from the webbing and store it in the glove box to prevent loss. Be sure to use the locking clip each time the child restraint system is reinstalled on the seat.

For further cautions, see your Owners Manual.