


Models	1983 280ZX
Section	Engine Fuel
Classification	EF84-007
Bulletin No.	TS84-029
Date	March 15, 1984

TURBO ELECTRONIC CONTROL UNITS, 1983 280ZX

Some 1983 280ZX turbos with manual transmissions may experience an intermittent stall during clutch disengagement while decelerating to a stop. To correct this condition, replace the Electronic Control Unit (ECU) with the appropriate unit, shown in the table.

PARTS INFORMATION

PART NAME AND APPLIED MODEL	PART NUMBER
ECU, Federal M/T turbo, 1983	22627-P9900
ECU, California M/T turbo, 1983	22627-P9910

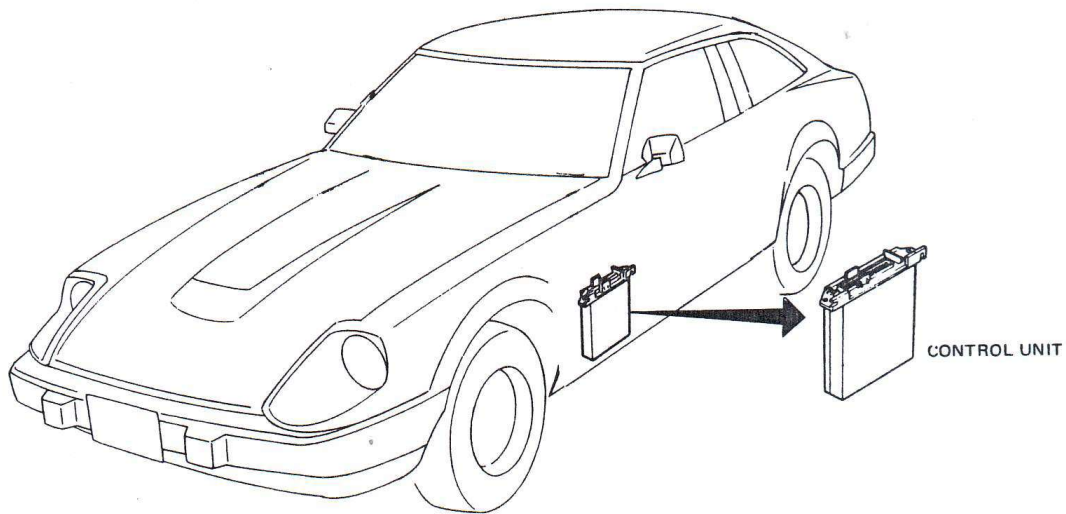

WARRANTY INFORMATION

<u>CS</u>	<u>PNC</u>	<u>CT</u>	<u>OPERATION NUMBER</u>	<u>FLAT RATE</u>
1F	22611	91	FU2100	0.3 hr.